



NEOEARTH

Model : HB1600 Series

(High Quality & Productivity Economical Hybrid Printer)



- Speed : Max 65 sqm/hr
- Quality : Max 1,200dpi, 4 Level Gray Scale, Various Masking Mode
- Simultaneous Printing Mode : 4 Layer printing available
- Hybrid Printing System : Flexible and Rigid media printing



Dilli Original UV Ink

DRS-320 : Exceptionally for Neo Earth Series

600 X 1200 dpi (max)


High resolution to express photorealistic images for graphic and signage applications

Dilli TVD® Imaging Technology



- 4-level gray scale (7-21pl)
- High Resolution (Max 1,200dpi)

Dilli DMPT® Imaging Technology

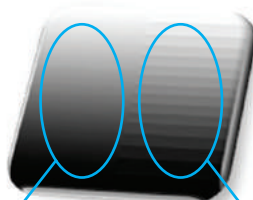

No banding with DMPT mode Banding without DMPT mode

- Masking Mode (Banding Free)
- Especially for Back/Front-lit Media

Hybrid Printing System



- You can print on rigid and roll media. Do not give up anything.

The most reliable partner for your business


Special Features of NEO EARTH Series

- ✕ Speed
 - Max 65 sqm/hr (Express Mode)
- ✕ Quality
 - Max 600 × 1200 dpi
- ✕ Color
 - Cyan, Magenta, Yellow, Black, Light Cyan, Light Magenta, White
 - Double Strike mode for Backlit media
- ✕ Special Functions
 - Hybrid Printing System : Flexible and Rigid media printing
 - UV LED Curing System
 - Print Head Collision Prevent System
 - Print Head Nozzle Protection System: White Ink Circulation System
 - Simultaneous Printing Mode : C+W / W+C / C+W+C / C+C+W+C
 - Enhancement of Space Utilization (Built-in Extension Table)




■ How to read model No.

HB1604-W2L

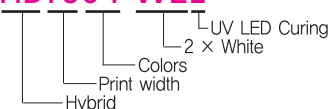

Neo Earth Series Specifications

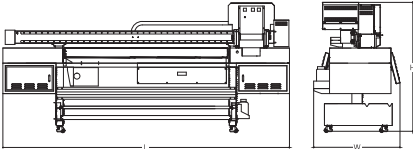Model		NE HB1604-W2L	NE HB1606L
Printing Technology		DOD (Drop-on-Demand) Piezoelectric Technology (Dilli True Variable Dot – Gray Scale)	
Print Speed	Express Mode (600×300)	65 m²/hr	
	Production Mode (600×600)	35 m²/hr	
	Quality Mode (600×900)	24 m²/hr	
	Fine Art Mode (600×1,200)	19 m²/hr	
Max. Print Size (Width)		1,600 mm	
Ink Color		4 Colors (C, M, Y, K) + 2 Whites	6 Colors (C, M, Y, K) + Lm, Lc
Media		Rigid & Flexible (Roll) Media	
Electricity		220V or 110V Single Phases	
Machine Size (L × W × H)		 ■ Machine Size (L)2,880mm × (W)880mm × (H)1,310mm ■ Installation Space (L)3,880mm × (W)2,250mm × (H)1,310mm	

※ The above specifications are subject to change without prior notice for improvement.



CE FCC MIC RoHS TVOC ISO 9001 ISO 14001 S UL

KOSDAQ
LISTED COMPANY

KOSDAQ Listed on the Korea Stock Exchange



 Authorized Economic Operator



Head office | 30, Gangbyeon-ro 702beon-gil, Dongducheon-si, Gyeonggi-do, Korea. Zip code : 11303

TEL 82-31-860-5500 (Rep.) FAX 82-31-860-5590

Branch of Seoul | 463, Songpa-daero, Songpa-gu, Seoul, Korea. Zip code : 05609

TEL 82-2-3431-8160 (Rep.) FAX 82-2-3431-8159

E-mail : oversales@dilli.co.kr | Homepage : www.dilli.co.kr